


Model (SL20TU-18MD) Specifications


**Electrical Data**

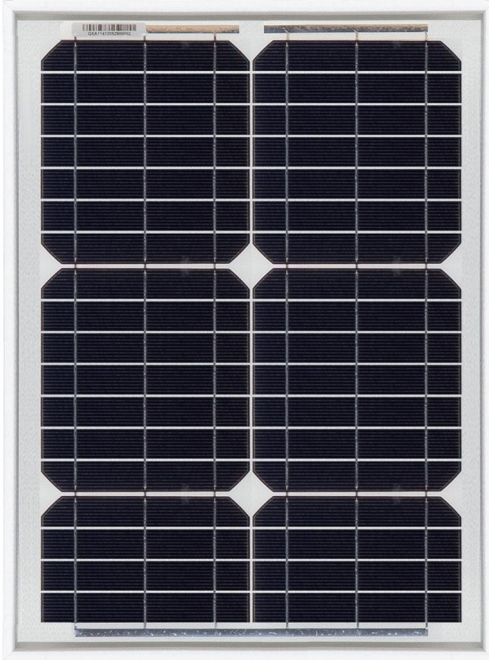

Maximum Power(W)	20W
Optimum Power Voltage(Vmp)	17.82V
Optimum Operating Current(Imp)	1.12A
Open Circuit Voltage(Voc)	22.54V
Short Circuit Current(Isc)	1.20A
Cell Efficiency (%)	16.76%
Module Efficiency (%)	11.45%
Tolerance Wattage(e.g. +/-3%)	0 +3%
NOCT	47°C +/-2°C

**Benefits**

- ❑ High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;
- ❑ Bypass diode minimizes the power drop caused by shade;
- ❑ Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;
- ❑ Modules independently tested to ensure conformance with certification and regulatory standards;
- ❑ Manufacturing facility certified to ISO 9001 quality management system standards.

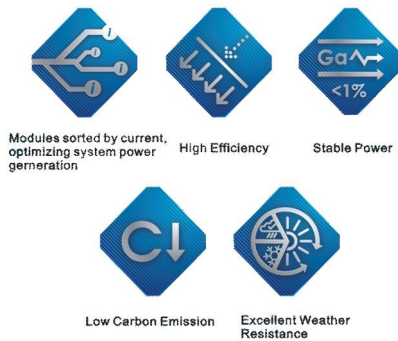

**Applications**

- ❑ On-grid residential roof-tops
- ❑ On-grid commercial/industrial roof-tops
- ❑ Solar power stations
- ❑ Other on-grid applications

**Temperature Coefficients**

Temperature Coefficients of Isc(%)	+0.04
Temperature Coefficients of Voc(%)	-0.38
Temperature Coefficients of Pm(%)	-0.47
Temperature Coefficients of Im(%)	+0.04
Temperature Coefficients of Vm(%)	-0.38





IGNITE THE POWER OF NATURE

Monocrystalline Module  
--small size 20Watt

Components & Mechanical

Solar Cell	156*21.9 ( 23.5 )	Mono
Number of Cell(pcs)	2*18	
Size of Module(mm)	485*360*28	
Front Glass Thikness(mm)	3.2	
Surface Maximum Load Capacity	2400-5400Pa	
Allowable Hail Load	23m/s ,7.53g	
Weight Per Piece(KG)	2.3	
Frame(Material Corners,etc.)	28#	
Backing (Brand Type)	TPT	
Temperature Range	-40°C to +85°C	
FF (%)	70-76%	
Standard Test Conditions	AM1.5 1000W/m <sup>2</sup> 25°C	


Packing

Packing	Wooden Box
Pieces per container	140pcs/Pallets

Project Picture



Engineering Drawings

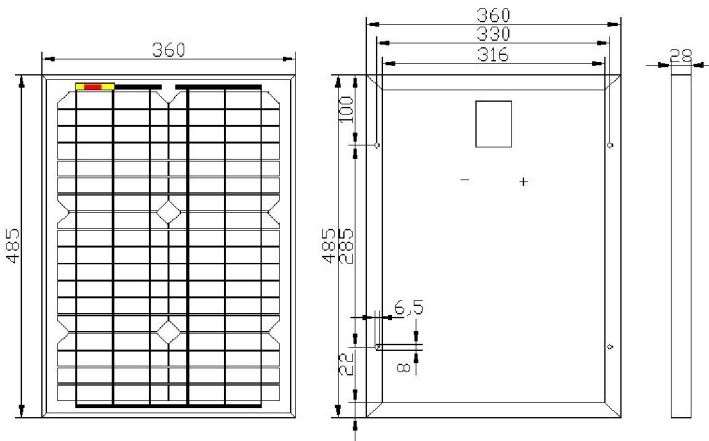

© 2013 Ningbo Qixin Solar Electrical Appliance Co., Ltd. All rights reserved.  
Specifications included in this datasheet are subject to change without notice.



**Ningbo Qixin Solar Electrical Appliance Co., Ltd**  
ADD: No. 37 Jingang Road, Binhai Industrial Park,  
Xiangshan County, Ningbo, 315700, China  
TEL: 0086 (0)574 25758821  
FAX: 0086 (0)574 25758820  
E-mail: info@nbqxsolar.com

