


Model (SL35TU-18MD) Specifications

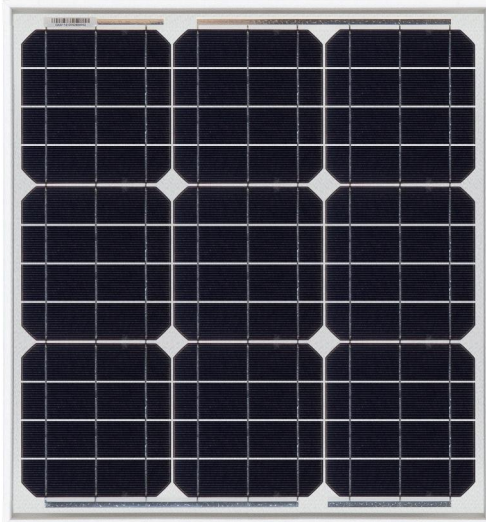


Electrical Data

Maximum Power(W)	35W
Optimum Power Voltage(Vmp)	17.82V
Optimum Operating Current(Imp)	1.96A
Open Circuit Voltage(Voc)	22.54V
Short Circuit Current(Isc)	2.10A
Cell Efficiency (%)	16.76%
Module Efficiency (%)	12.47%
Tolerance Wattage(e.g. +/-3%)	0 →+3%
NOCT	47°C +/-2°C

Benefits

- ❑ High efficiency solar cells with high transmission and textured glass are delivering high efficiency for modules;
- ❑ Bypass diode minimizes the power drop caused by shade;
- ❑ Tempered glass, EVA resin, and weatherproof film, plus aluminum frame for extended outdoor use;
- ❑ Modules independently tested to ensure conformance with certification and regulatory standards;
- ❑ Manufacturing facility certified to ISO 9001 quality management system standards.

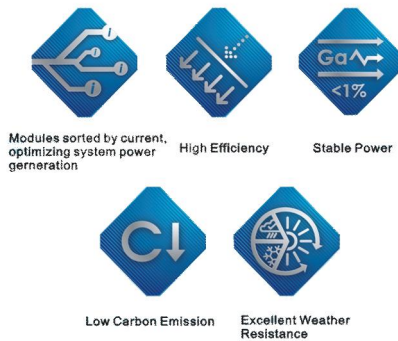

Applications

- ❑ On-grid residential roof-tops
- ❑ On-grid commercial/industrial roof-tops
- ❑ Solar power stations
- ❑ Other on-grid applications

Temperature Coefficients

Temperature Coefficients of Isc(%)	+0.04
Temperature Coefficients of Voc(%)	-0.38
Temperature Coefficients of Pm(%)	-0.47
Temperature Coefficients of Im(%)	+0.04
Temperature Coefficients of Vm(%)	-0.38





IGNITE THE POWER OF NATURE

Monocrystalline Module
--small size 35Watt

Components & Mechanical

Solar Cell	156*38.3(39.7)	Mono
Number of Cell(pcs)	3*12	
Size of Module(mm)	545*515*28	
Front Glass Thikness(mm)	3.2	
Surface Maximum Load Capacity	2400-5400Pa	
Allowable Hail Load	23m/s ,7.53g	
Weight Per Piece(KG)	3.4	
Frame(Material Corners,etc.)	28#	
Backing (Brand Type)	TPT	
Temperature Range	-40°C to +85°C	
FF (%)	70-76%	
Standard Test Conditions	AM1.5 1000W/m ² 25°C	


Packing

Packing	Wooden Box
Pieces per container	70pcs/Pallets

Project Picture



Engineering Drawings

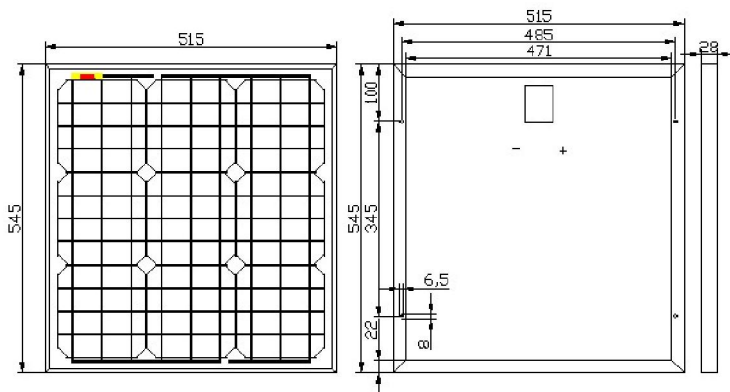

©2013 Ningbo Qixin Solar Electrical Appliance Co., Ltd. All rights reserved.
Specifications included in this datasheet are subject to change without notice.



Ningbo Qixin Solar Electrical Appliance Co., Ltd

ADD: No. 37 Jingang Road, Binhai Industrial Park,
Xiangshan County, Ningbo, 315700, China

TEL: 0086 (0)574 25758821

FAX: 0086 (0)574 25758820

E-mail: info@nbqxsolar.com

